

## THE BEST ALWAYS RISE TO THE TOP

SUNSTREAM  
**FLOATLIFT™**

Visualize using your boat like your car with the unmatched speed, security, versatility and ease of use of the Sunstream FloatLift™. Powerful hydraulics pull the foam-filled polyethylene floats under the boat in as little as 30 seconds with the simple press of a remote control. In the raised position, the virtually unsinkable floats are automatically secured with patented GravityLock™. The floats also make it easy to access your hull and prop for cleaning and maintenance.



### COMPLETE CONTROL

One-button on the included remote control to raise/lower your boat.



### SWIFTSHIELD™ (ACCESSORY)

Semi-Automatic Remote controlled boat cover system

Simply tie the FloatLift™ to most places you can tie your boat: slips, side-ties or even a mooring buoy. The DC system can be charged using either the solar or AC powered options. The standard rear guides and remote control make docking incredibly easy.


The FloatLift™ is designed for fresh or salt water, with an aluminum frame, stainless steel hardware, marine grade hydraulic cylinders with stainless shafts, and marine grade hoses. The rubber-capped SuperBunks™ are not only durable, but provide the ultimate in cushioned support for your hull.

- Level launch/lift in seconds
- Durable, foam-filled polyethylene pontoons
- Free-floating, portable design ties with dock lines
- Versatile docking locations: slips, side-tie, mooring buoys
- Stylish, low profile design allows accessibility to hull and prop
- Capacities up to 36K lbs, min water depth 12" under hull
- Remote-controlled operation
- Solar or AC power options

PREMIUM FREE-FLOATING HYDRAULIC BOAT LIFT



SUNSTREAMCORP.COM

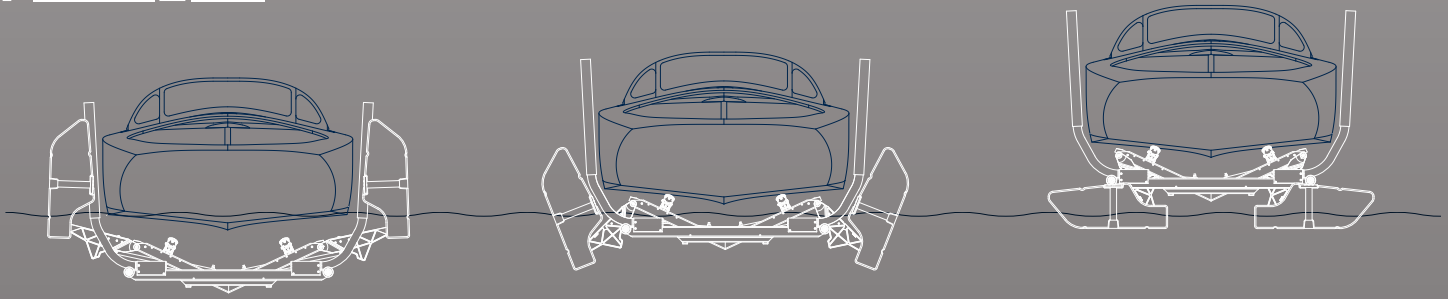

## SPECIFICATIONS

FloatLift Models	FL6012	FL10014	FL13018	FL13018W	FL15023	FL15023W	FL24020	FL36026
Capacity (kg)	2,722	4,763	5,897	5,897	6,810	6,810	10,896	16,344
Lift Length (m)	6.1	7.32	8.84	8.84	10.37	10.37	11.59	13.42
Lift Width UP Position (m)	3.23	3.38	3.38	4.08	3.64	4.08	4.88	4.88
Weight (kg)	590	1,134	1,315	1,406	1,737	1,771	3,632	4,086
Launching Speed (approx.)	18 sec	18 sec	40 sec	40 sec	35 sec	35 sec	60 sec	90 sec
Water Depth Required (cm)	draft + 30	draft + 30	draft + 30	draft + 30	draft + 30	draft + 40	draft + 50	draft + 50
Minimum Slip Width (m)	3.66	4.27*	4.27*	4.88**	4.27*	4.88**	6.71	6.71
Maximum Boat Beam (m)	2.62	3.23	3.23	3.66	3.20	3.66	4.19	4.27
Allowable Draft for typical V-Hull (cm)***	50-55	86	86	86	86	86	121	121

\* Wider slip required for beams over 2.90m \*\*Wider slip required for beams over 3.51m

\*\*\*For Cat Hull allowable draft subtract 3.66m for many boats

PATENTS: 6830410, D487423, D484086,

D484450, 6823809, 7527014, 6032601

## ACCESSORIES

- SwiftShield™ - Semi-Automatic Boat Cover System **NEW**
- HoverCover™ for protection from sun, rain and debris
- Motorstop for positioning fore and aft
- HandsFree™ Controller (patented and patents pending) **NEW**
- PowerPack shelves for mounting PowerPack to guide-on or dock
- Universal LED Underwater Lights
- Tournament Boat Bunk Bracket
- Pontoon Kits with and without Ballast System

HoverCover™ Models	FA-H24108	FA-H30144*
Length (m)	7.32	9.14
Width Between Uprights (m)	2.69	Min 2.89 Max 3.20
Cover Material -- navy	Sunbrella Canvas	Sunbrella Canvas
Lift Model	FL6012	FL10014*, FL13018*
Max Boat Height without HC Extensions **	2.20	2.61



Remote control standard with all FloatLift™ models.

\* Not for use with mooring buoy application

\*\*Boat height = hull draft + bridge clearance

